

PRO-COM450-HDAR-4/...

4-Channel 19" 3 HU Single Tray Combining System

- An integrated single tray combining solution housing a 4-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION


- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 4 RX ports as standard.
- Please specify TX / RX frequencies when ordering.



ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
PRO-COM450-HDAR-4/l	210001788
PRO-COM450-HDAR-4/h	210001855
PRO-COM450-BHDAR-4/l (With black frontplate)	210002348
PRO-COM450-BHDAR-4/h (With black frontplate)	210002349
ACCESSORIES	
ADAPTOR AC/DC 12V EU	240000040
ADAPTOR AC/DC 12V UK	240000041

MOUNTING

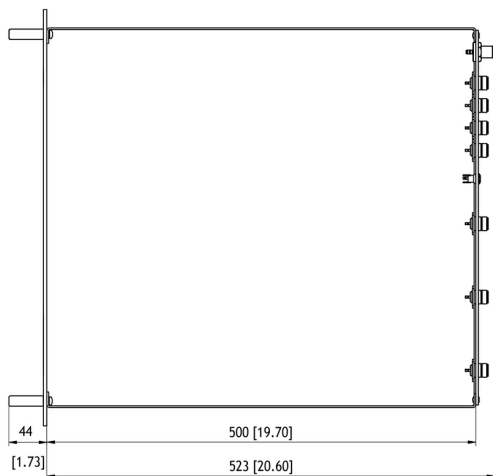

All dimensions are given in mm [in.].

SPECIFICATIONS

ELECTRICAL	
MODEL	PRO-COM450-HDAR-4/...
FREQUENCY RANGE	l: 340 - 400 MHz h: 406 - 470 MHz
MAX. INPUT POWER PER CH	50 W
MAX. TX-TX SPACING, Δ TX	2.0 MHz
MIN. TX-RX SPACING	5 MHz
INSERTION LOSS - TX PATH	< 8.0 dB
TX-TX ISOLATION	> 70 dB
ANT-TX ISOLATION	> 40 dB @ 25° C
RX ISOLATION IN TX BAND TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz	> 85 dB > 65 dB
TX ISOLATION IN RX BAND RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz	> 85 dB > 65 dB
RX-RX ISOLATION	> 20 dB
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.5
LNA NOISE FIGURE	< 3.5 dB
GAIN - RX PATH	1 dB +/- 1 dB (factory set)
CURRENT CONSUMPTION	500 mA @ 12 VDC
MECHANICAL	
TEMP. RANGE	-30° C → +60° C
CONNECTORS	N-female
DIMENSIONS	19" x 3 HU - see drawing for depth of tray
WEIGHT	Approx. 7.5 kg

ADAPTOR AC/DC 12V EU



EU DECLARATION OF CONFORMITY

Hereby Amphenol Procom declare that the product type PRO-COM450-HDAR-4/... is in compliance with EU Directive 2014/53/EU.

The full text of the EU Declaration of Conformity is available at:

<http://procom.dk/images/pdf-for-catalogues/Declaration-of-Conformity-PRO-COM-HDAR.pdf>

ADAPTOR AC/DC 12V UK

